


"FPF15KP" SERIES FAN FILTERS

Description: **Fan Filter 115/230 Va.c.**





| | |
|---------------------------------|---------------------------------------------------------------------|
| Type of material: | ABS/PC alloy |
| Standard colour: | RAL 7032 and RAL 7035 - other colors on request |
| Protection degree: | IP54, according to EN 60529 Std Type 12, according to UL 508 Std |
| Fixing system: | by elastic hooks, otherwise by four 4.8 mm self-threading screws |
| Plate thickness: | from 1.5 mm to 2.2 mm |
| Storage temperature: | from -45°C to +75°C |
| Lifetime L10 at 40°C: | 45,000 h |
| Motor protection: | impedance |
| Electrical connection: | by terminal block 3 poles L-N-PE |
| Earth connection: | (by terminal block, PE pole) |
| Appliance class: | Class I |
| Type of filter media: | thermo-linked progressive structure synthetic fibre |
| Filtering class: | class G3, according to EN 779 |
| Degree of separation: | 85% - DIN 24185 |
| Dust retention capacity: | 600 g/m ² |
| Note: | filter media is washable for about 10 times |
| Weight: | 1.4 Kg |
| Approvals: | CE, UL E223195/UL E237844 |

technical drawing

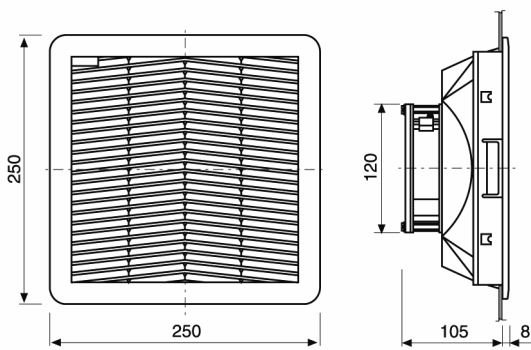

mounting cut-out

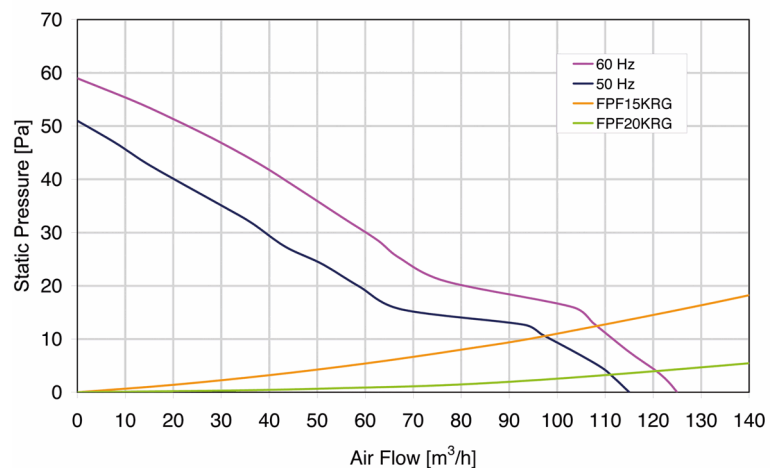

| Model | Voltage | Frequency | Rated Current | Rated Power | Max Air Flow** | Static Pressure | Noise | Rated Temp. Range | Approvals |
|--------------------|------------|-----------|---------------|-------------|----------------|-----------------|-----------|-------------------|-----------|
| | (V) | (Hz) | (A) | (W) | (m3/h) | (Pa) | [db(A)] | (°C) | |
| FPF15KPR115BE-110 | 115 V a.c. | 50/60 | 0.210/0.180 | 20/18 | 115/125 | 51/59 | 43.0/48.0 | -10 ÷ +50 | CE; UR |
| FPF15KPR115BER-110 | 115 V a.c. | 50/60 | 0.210/0.180 | 20/18 | 115/125 | 51/59 | 43.0/48.0 | -10 ÷ +50 | CE; UR |
| FPF15KPR230BE-110 | 230 V a.c. | 50/60 | 0.125/0.110 | 20/19 | 115/125 | 51/59 | 43.0/48.0 | -10 ÷ +50 | CE; UR |
| FPF15KPR230BER-110 | 230 V a.c. | 50/60 | 0.125/0.110 | 20/19 | 115/125 | 51/59 | 43.0/48.0 | -10 ÷ +50 | CE; UR |

data with uncertainty of 15%

All specifications, data and drawing are subject to change without notice and are approximate. Please refer to our terms of sales including our warranty and limited liabilities clauses.